


Dimensiones Bobinas

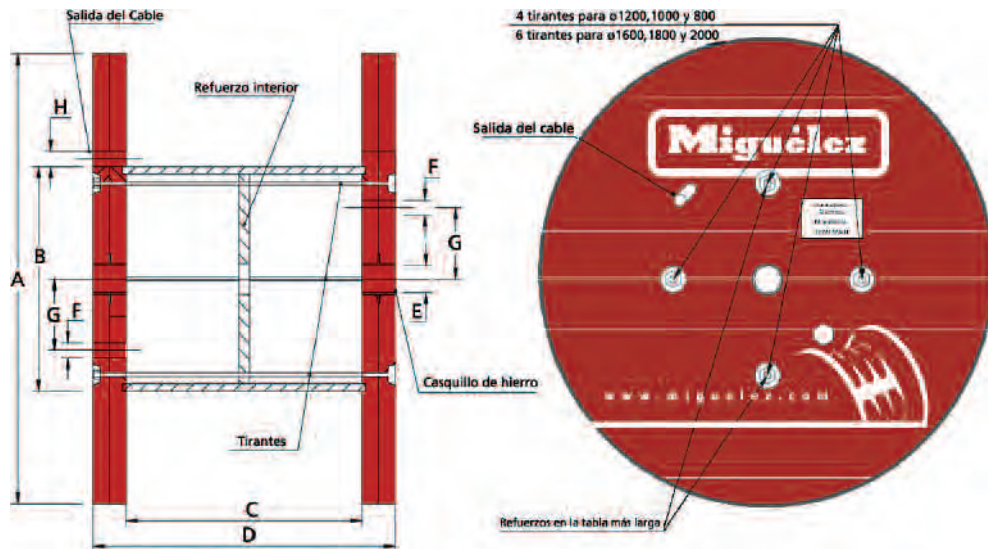

A	B	C	D	E	F	G	H	Refuerzo Interior
630	300	360	450	82	50	150	30	No
800	400	520	600	82	50	155	30	No
1000	500	610	710	82	50	210	40	No
1200	600	640	730	82	50	210	50	Si
1250	630	710	810	82	50	210	50	Si
1400	710	810	930	82	50	210	50	Si
1600	700	820	1000	82	50	210	50	Si
1750	1120	960	1100	82	50	210	50	Si
2000	1250	960	1100	82	50	210	50	Si

Bobinas	Numeración
ø 600	06x0000
ø 800	08x0000
ø 1000	10x0000
ø 1200	12x0000
ø 1250	13x0000
ø 1400	14x0000
ø 1600	16x0000
ø 1800	18x0000
ø 2000	20x0000

Tabla de Capacidad de Bobinas

Diámetro de las Bobinas							
Ø cables mm	630	800	1000	1250	1400	1600	2000
3	4700						
4	3500						
5	2300	5500					
6	1600	3700					
7	1100	2800	4900				
8	900	2100	3600				
9	700	1700	2800				
10	500	1300	2300	4200			
11	400	1100	1850	4400			
12	350	900	1600	3600	5100		
13	250	700	1300	3100	4300		
14	250	650	1100	2700	3900		
15	200	600	1000	2400	3300	5800	
16	200	450	850	2000	2900	5100	
17	150	450	800	1700	2600	4500	
18	150	350	700	1600	2300	4100	5100
19	100	350	600	1450	2100	3600	4580
20	100	300	550	1300	1800	3300	4135
21	100	250	450	1100	1600	3000	3750
22	100	250	450	1050	1500	2700	3415
23	100	200	350	950	1350	2400	3125
24	50	200	350	950	1300	2200	3870
25	50	200	350	950	1250	2100	2645
26		160	290	850	1160	1900	2445
27		150	290	820	1130	1700	2265
28		150	280	790	960	1600	2110
29		140	270	690	930	1400	1965
30		140	220	660	930	1400	1835

CONTINUACIÓN 

Diámetro de las Bobinas							
Ø cables mm	630	800	1000	1250	1400	1600	2000
31		140	220	630	810	1200	1720
32		100	210	570	780	1200	1615
33		100	210	540	750	1200	1515
34			190	510	640	1000	1430
35			160	460	640	1000	1350
36			150	430	620	1000	1275
37			150	430	520	800	1205
38			140	410	520	800	1145
39			140	360	500	800	1085
40			130	340	500	800	1030
41			130	340	470	700	980
42				320	410	700	935
43				320	390	650	895
44				320	390	650	850
45				250	390	550	815
46				250	370	550	780
47				250	370	550	745
48				240	300	550	715
49				240	300	500	585
50				240	300	500	660
51				220	280	450	635
52				180	280	400	610
53					280	400	585
54					280	400	565
55					260	400	545
56					210	400	525
57					210	400	505
58					200	300	490
59					200	300	475
60					200	300	455